



PATENT ABSTRACTS OF JAPAN

(11) Publication number: **06232768 A**(43) Date of publication of application: **19.08.94**(51) Int. Cl. **H03M 13/12**(21) Application number: **05015550**(71) Applicant: **TOSHIBA CORP**(22) Date of filing: **02.02.93**(72) Inventor: **TAJIMA MASATO**(54) **CONVOLUTION CODING DATA DECODER**


value (e) to obtain a decoded error after simple decoding.

(57) Abstract:

COPYRIGHT: (C)1994,JPO&Japio

PURPOSE: To improve the decoding accuracy of transmission information data, that is, convolution coding data by generating a syndrome from difference data between re-coding data and reception data as a preprocessing, estimating a line error through the application of the syndrome decoding method and implementing inverse coding at a post-processing.

CONSTITUTION: A simple decoder 110 is used for a 1st decoder and a main decoder 130 is used for a 2nd decoder. An inverse coder G^{-1} is used for the decoder 110 similarly to a conventional decoder, a delay time τ_1 of a delay circuit 140 is set to zero, and the decoder 130 consists of a pre-processing circuit 131, a syndrome decoder 132, and a post-processing circuit 133. The pre-processing circuit 131 generates a corresponding syndrome to difference data between a re-coded data and reception data, that is, input data to the decoder 130, then a line noise (e) is estimated by allowing the pre-processing circuit 131 generates a corresponding syndrome and using the decoder 132 to generate a syndrome with the syndrome decoding method for a convolution code. Then the post-processing circuit 133 applies post-processing to the estimated

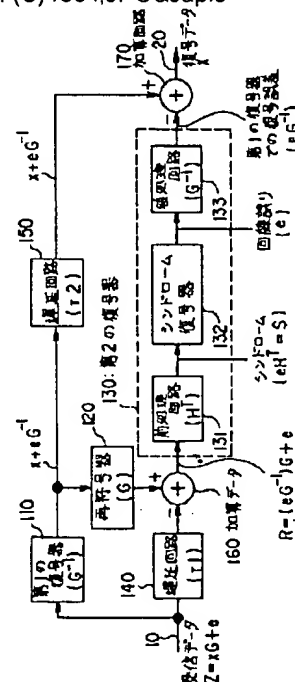

CD-ROM Aug 1994